

EmETXe-i88U0

5th Generation Intel® Core™ Processor
 COM Express® Compact Type 6 CPU Module



Features

- Soldered Onboard 5th Generation Intel® Core™ i7-5650U 2.2GHz
- Integrated Gigabit Ethernet
- Dual Channels 24-bit LVDS, and 2 x DDI ports
- Support 3 independent displays
- **Wide Range Operating Temp.: -40 ~ 85°C**

System

Processor	Soldered Onboard 5 th Generation Intel® Core™ Processor i7-5650U 2.2GHz
Memory	1 x DDR3L SO-DIMM socket, supporting up to 8GB 1600MT/s SDRAM
BIOS	AMI BIOS
Watchdog Timer	1~255 levels reset

I/O

USB 2.0	8 x USB 2.0 ports
USB 3.0	2 x USB 3.0 ports
Expansion	8 x PCIe1 Gen.2, LPC
Storage	3 x Serial ATA ports with 600MB/s HDD transfer rate
Ethernet Chipset	1 x Intel® i218LM PCIe GbE PHY with iAMT
Digital I/O	8-bit Programmable
Audio Interface	HD link
TPM Function	TPM supported (OEM request)

Display

Graphics Chipset	Integrated Intel® Graphics
Graphics Interface	LCD: Dual Channels 24-bit LVDS, with resolution up to 1920x1200 DDI port: 2 x DDI ports


OS Support

Windows 7 32-bit/64-bit
 Windows 8.1 32-bit/64-bit
 Linux: Ubuntu


Mechanical & Environmental

Power Requirement	DC 12V, 5VSB
Power Consumption	2.04A@12V, 0.32A@5VSB (Typical, with PBE-1702)
Operating Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95%@ 85°C (non-condensing)
Dimension (L x W)	95 x 95 mm (3.7" x 3.7")


Dimensions

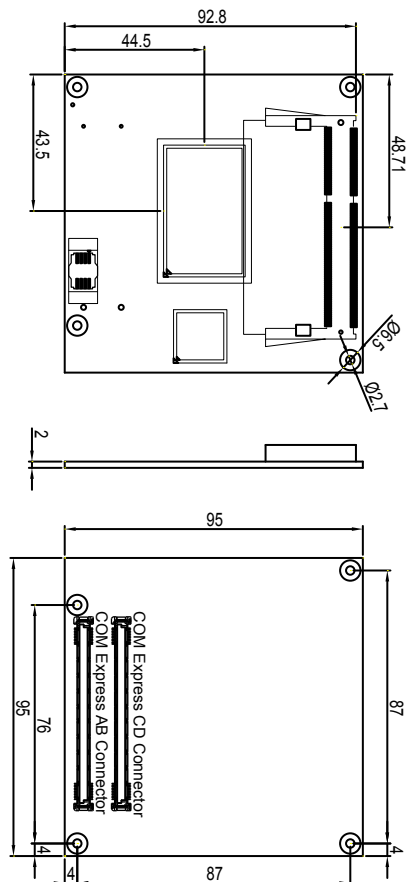

Unit:mm



Block Diagram

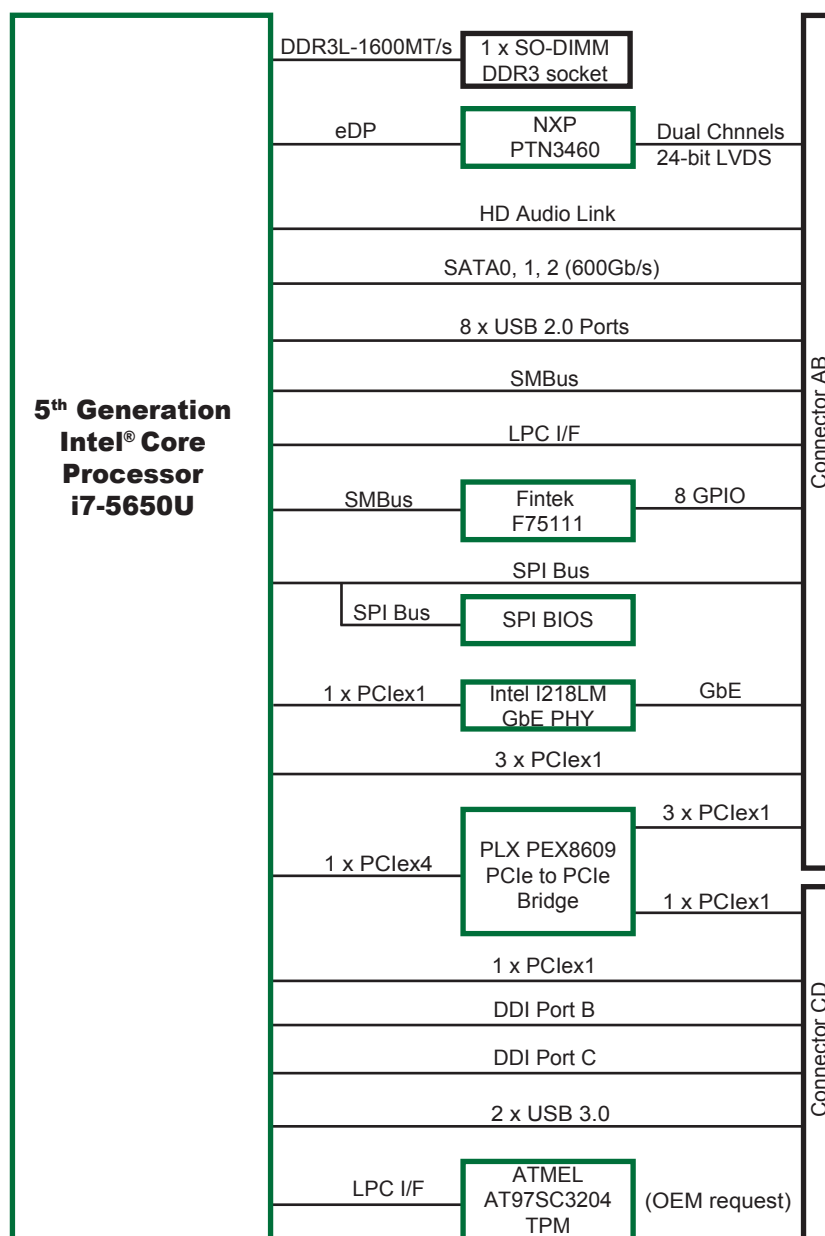

Ordering Information

EmETXe-i88U0 5th Generation Intel® Core™ i7-5650U COM Express® Compact Type 6 CPU module

Optional Accessories

HS-88U0-F2-T*	Heat spreader with threaded standoffs 95x95x11mm, not compatible with WT series
HS-88U0-F2-NT*	Heat spreader without threaded standoffs 95x95x11mm, not compatible with WT series
HS-0000-W4	Universal evaluation heat sink kit with thermal pad 125x95x22mm, only used on a flat-type heat spreader
HS-88U0-C1	Heat sink with FAN 95x95x30.5mm
CPF-0000-C1	FAN, 4500RPM, 60x60x20mm
PBE-1702	COM Express® Type 6 evaluation carrier board with Super IO F71869ED in ATX form factor
CBK-04-1702-00	Cable kit
	1 x SATA cable
	2 x Serial port cables
	1 x USB cable

*For Wide-Temperature range operation, it is suggested to use HS-88U0-F2-T or HS-88U0-F2-NT in conjunction with HS-0000-W4 .