



# iTC-1121R

## Fanless Industrial Panel PC w/ Intel® Elkhart Lake Processor



### Features

- Intel® Celeron® Processor J6413 (1.5M Cache, up to 3.00 GHz)
- 12.1" 1024 x 768 XGA LCD display
- Fanless design w/ Aluminum Front bezel
- Flush front panel w/ IP65 waterproof compliant
- Support 2.5GbE LAN and USB 3.2 Gen1 (5Gbps)
- Rich I/O: 4 x COM/ 2 x LAN/ 4 x USB3.2(5Gbps)/ 8-bit DI/O & dual video output: DisplayPort and DVI-D
- Easy-accessible expansion for storage and wireless module.
- 9~36V wide-range DC input with reverse protection

### System

CPU	Intel® Celeron® J6413 Quad-Core™ Processor 1.80GHz
Memory	1 x 260 pin DDR4 SO-DIMM socket, supporting 3200MHz SDRAM up to 32GB (4GB DDR4 SO-DIMM pre-installed)
LAN	1 x Intel® 225LM controller 1 x Intel® i211AT controller
Watchdog Timer	1~255 levels reset

### Storage

1st Device	1 x M.2 M-key 2242/ 2280 (SATAIII only)
2nd Device	1 x 2.5" SSD/ HDD tray

### Audio

Type	1 x Mic-in / 1 x Line out
Speaker	2 x 1.5W speakers (optional)

### LCD Display

Size/Type	12.1" TFT LCD Panel
Max. Resolution	1024 x 768, XGA
Max. Colors	16.2M
Luminance	500 cd/m <sup>2</sup>
Touch Screen	Flat 5-wire Analog Resistive
View Angle (U/D/R/L)	89°/89°/89°/89°

### Button & Indicator

Buttons	Power on & Reset
LED Indicator	Power-on status/ HDD status/ RTC battery status

### Power System

Power Input	DC 9~36V
Power Consumption	Typical 25W (w/o I/O cards)
Remote Control	1x3-pin terminal block for remote control and PWR LED output

### Qualification

Certification	CE, FCC Class A
---------------	-----------------

### Expansion

Expansion Bus (for Wireless connection)	1 x Mini PCIe slot (PCIe x1+ USB2.0, Full size) w/ 1 x SIM card slot
---	--

### External I/O

Serial Ports	2 x DB-9 connectors for RS232/422/485 2 x DB-9 connectors for RS232
USB Ports	4 x Type-A USB 3.2 Gen1 (5Gbps)
LAN	1 x RJ-45 ports for GbE LAN 1 x RJ-45 ports for 2.5 GbE LAN
Video Ports	1 x DVI-D connector, supporting Full HD resolution 1 x DisplayPort 1.4 connector, supporting 4K2K resolution
Digital I/O	8 bit Digital I/O

### Mechanical

Mounting Type	Panel mount (clamps are provided) VESA-75/100 mount (optional)
Chassis	Aluminum front bezel and steel-metal chassis
Dimension (W x H x D)	315 x 260 x 68.8 mm
Weight (Net)	3.6 kg

### Environmental


Operating Temp.	-10 ~ 55°C
Storage Temp.	-20 ~ 70°C
Operating Humidity	10 ~ 95% RH @ 55°C (non-condensing)
Vibration	5 ~ 500Hz, 1Grms X,Y,Z axis (with SSD)
Shock	Operating 10G, 11ms X,Y,Z axis (with SSD)

### OS Support





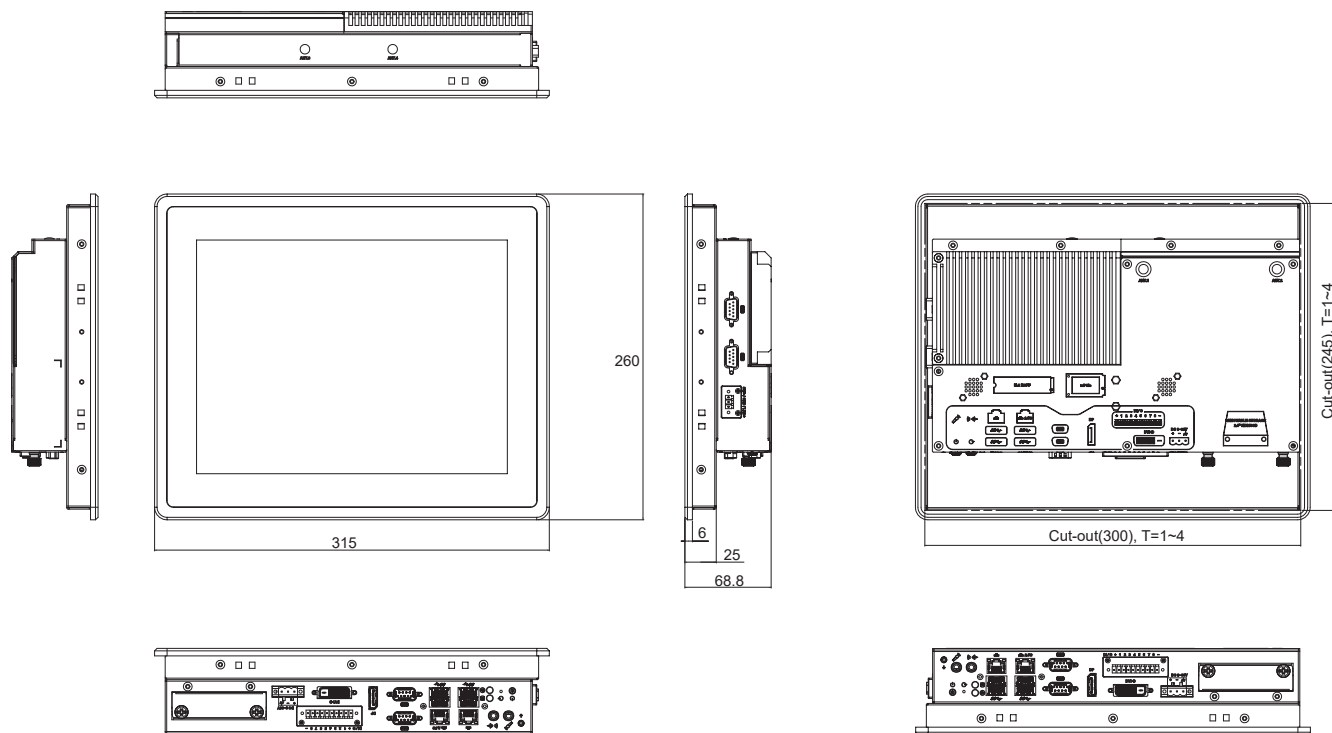


Windows®10 (64bit)	
--------------------	--

All specifications are subject to change without notice.

# Dimensions



## Optional Accessories

PAC-60W6A-FSP-ES	12V/5A 60W AC/DC power adapter kit	
VMB-1121	iTC-1121R VESA-mount bracket kit, w/ 75 x 75 mm & 100 x 100 mm VESA supports	
64/128/256GB SSD	2.5" SSD MLC 64/128/256GB	
64GB M.2 SSD	M.2 M-key 2242/ 2280, 64GB, SATA3.0	
WiFi-AT4550	Atheros, QCNFA324 Wi-Fi module w/ 2*30cm internal wiring	
ANT-D11	1 x Wi-Fi Dual-band 2.4G/5G antenna	
ADK-11X	iTC-11xx series audio kit	
SCK-722C	Assembly kit for SiP-41B/42B (Note: SCK-722C can only be installed with VMB-1121 Mounting Bracket)	